

# Mk2<sup>®</sup>

STD PEAK - NON-VENT - SLIP RATCHET

PRODUCT CODE: AHB010-00\_-\_00

MANUFACTURED FROM IMPACT-RESISTANT UV STABILISED HIGH DENSITY POLYETHYLENE

## TECHNICAL SPECIFICATION

### HEAD PROTECTION

### INSTRUCTIONS FOR USE

Fit helmet on head and fasten strap to ensure fit

For adequate protection this helmet must be worn with peak facing forward

Ensure the helmet is adjusted to the size of the user's head

SLIP RATCHET:  
EasyJust<sup>®</sup> Slip Ratchet



POLY HARNESS:  
LDPE strap & clips with  
polyethylene harness



SWEATBAND:  
Brushed Nylon Backed Foam

SHELL:  
Recyclable UV Stabilised  
HDPE



### CLEANING & MAINTENANCE

The unit may be cleaned with soap and warm water and dried with a soft cloth

The helmet should not be cleaned with chemical or abrasive cleaners

The helmet should be stored out of direct sunlight

The helmet should be stored away from chemicals and extremes of temperature

### CONFORMITY

Conforms to EN 397 & EN 50365:2002

EC Certificate Num.0279, issued by BSi Product Certification

Low dome profile

Meets optional Electrical Insulation requirements

Available in a choice of colours

Incorporates a rain channel

Company personalisation available by printing

Compatible with other JSP safety products

### STD PEAK - NON-VENT - SLIP RATCHET

PRODUCT CODE: AHB010-00 - 00

MANUFACTURED FROM IMPACT-RESISTANT UV STABILISED HIGH DENSITY POLYETHYLENE


# TECHNICAL SPECIFICATION

## HEAD PROTECTION

## DIMENSIONS OF OUTER PACKAGING

Quantity: 40

Weight: 15.5kg (Approx.)

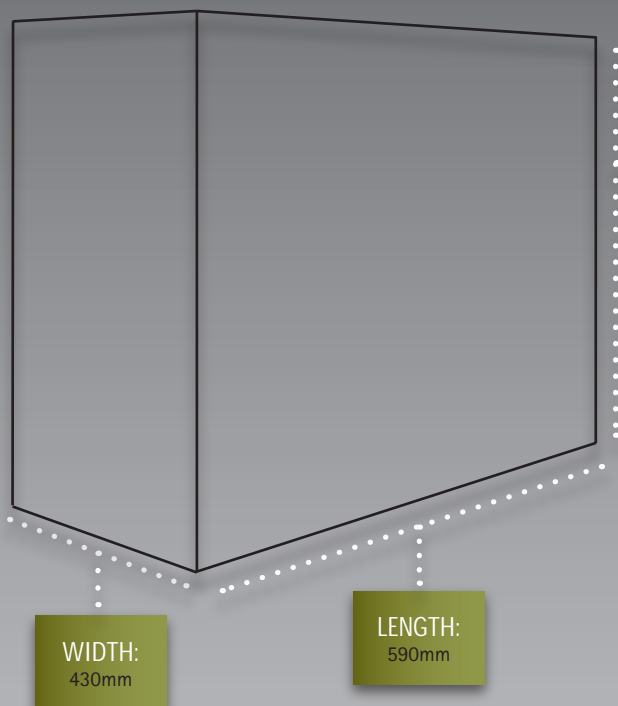

HEIGHT:  
765mm

## DIMENSIONS OF HELMET

Length: 279mm

Width: 217mm

Height: 167mm

Weight: 356g (Approx.)



## HELMET COLOURS

Insert the following two digit number in place of the dashes in the product code of your desired helmet



## HELMET FEATURES

EN STANDARD	EN397 EN50365	Yes Yes
PERFORMANCE	Impact Resistance Electrical Insulation	Yes 50 Joules Yes: EN397 440V EN50365 1000V
TEMPERATURE RESISTANCE	Molten Metal (MM) +50°C	Yes Yes
SHELL MATERIAL	HDPE Recyclable	Yes Yes
HARNESS MATERIAL	LDPE Textile	Yes Yes
OPTIONS	Universal Accessories Integrated Eyewear 2pts or 3pts Chinstrap	Yes Yes Yes
HARNESS SYSTEM OPTIONS	Slip Ratchet Wheel Ratchet	Yes Yes
LOGO OPTIONS	Front Rear Side MOQ Logo Individual Name	Yes Yes Yes 10 Yes

## LIMITATIONS OF USE

Protection will only be offered if the helmet is fitted correctly

Any helmet subjected to severe impact should be replaced immediately. Do not apply paint, solvents or adhesive labels except in accordance with instructions from the manufacturer

The harness, when in contact with the skin may cause allergic reactions to susceptible individuals. If this occurs leave the hazard area, remove the helmet and seek medical advice

The attention of users is also drawn to the dangers of modifying or removing any of the original component parts, other than as recommended by the manufacturer



MANUFACTURING FOR SAFETY  
WWW.JSP.CO.UK

UKSALES@JSP.CO.UK  
TEL: +44 (0)1993 826050

