


Product Datasheet model uvex sportstyle 9193 064**UVEX ARBEITSSCHUTZ GMBH, Würzburger Str. 181-189,
D-90766 Fürth****1. Product Characteristics**

- sporty, lightweight safety spectacle with a contoured lens that will fit narrow and wider faces equally well
- the combination of soft padding around the brow with ergonomically shaped side arms and soft-grip temple ends provide a comfortable, secure fit without pressure
- soft, adjustable nose pad allows spectacle to be adapted to the wearer to deliver a comfortable, non-slip and pressure-free fit
- robust polycarbonate lens with uvex's proven supravision coating technology – permanent anti-fog and scratch-resistant lens
- UV400 – 100 % protection against dangerous UVA and UVB radiation up to 400 nm

2. Technical Details Body**Front piece**

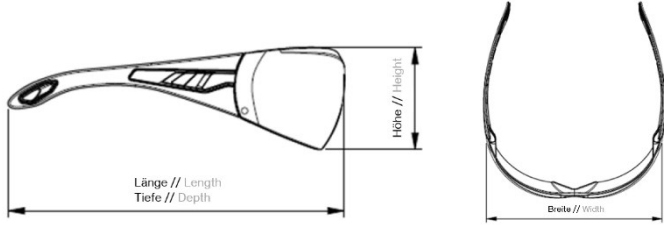
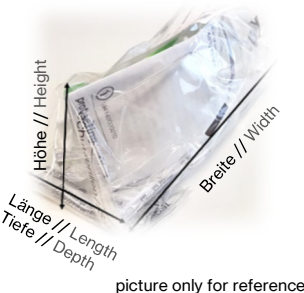
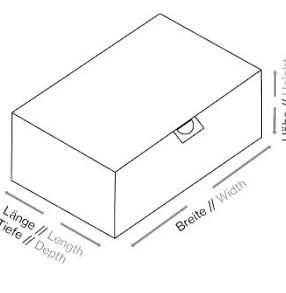

| | |
|----------|---------------------------|
| Material | PC-PBT/TPE |
| Features | soft, adjustable nose pad |
| Colour | white, black |

| | |
|---|----------------------|
| Rivet | |
| Material | brass, nickel-plated |
| Side arms | |
| Material | PC-PBT/TPE |
| Colour | white, black |
| Marking | |
| Manufacturer 's ID code | W |
| Applicable EN norm | 166 |
| Impact resistance | F (45 m/s) |
| Resistance to high speed particles at extremes of temperature | T |
| Conformity symbol | CE |

| | |
|---|---|
| 3. Technical Details Lens | |
| Material | PC |
| Thickness | 2.1 mm at PD |
| Coating | uvex supravision extreme |
| Colour | CBR65 |
| Features tint | blue light reduction up to 50% |
| UV protection | UV400 |
| Marking | |
| Filter | 5-1.4 (EN 172) |
| Manufacturer 's ID code | W |
| Optical class | 1 |
| Impact resistance | F (45 m/s) |
| Resistance to high speed particles at extremes of temperature | T |
| Scratch resistance | K |
| Antifog | N |
| Conformity symbol | CE |
| Factory symbol |  |

4. Logistical Information

Product

| | | | |
|---|--|---|--|
| Weight | 23g | | |
| Dimensions (L x W x B) in approx. mm |  <p style="text-align: right;">picture only for reference</p> | | |
| | 160 x 149 x 45 | | |
| | Packing unit 1 | Packing unit 2 | Packing unit 3 |
| EAN Code | 4031101668291 | | |
| Quantity in pcs. | 1 | 10 | 160 |
| Dimensions (L x W x H) in approx. mm |  <p style="text-align: center;">picture only for reference</p> |  |  |
| | 60 x 150 x 48 | 185 x 290 x 97 | 600 x 400 x 400 |
| Net weight in approx. g | 23 | 230 | 3680 |
| Gross weight in approx. g | 37 | 475 | 8.470 |
| Country of Origin | Germany | | |

5. Miscellaneous

| | |
|--------------|-----------------|
| Standards | EN 166 + EN 172 |
| PPE Category | Category II |