SUREFIT™ INTER™ and SONIS® VISOR CARRIER

FOR FVO® RANGI

TECHNICAL SPECIFICATION

HEAD PROTECTION

ACCESSORIES

THE SUREFIT™ INTER™ AND SONIS® VISOR CARRIER CLIPS INTO A UNIVERSAL SLOT & FITS THE FULL RANGE OF JSP INTER™ AND SONIS® HELMET MOUNTED EAR DEFENDERS

INSTRUCTIONS FOR USE

In use ensure that the helmet, visor carrier and visor fits comfortably and securely on the head

Ensure that a suitable visor has been fitted with the protective film removed from it

Ensure the visor is in place before entering the hazard area

COMPATIBILITY

Compatible with the EVO® Range of safety helmets including the:



Compatible with the full Inter™ range of helmet mounted ear defenders including the:



Compatible with the full Sonis® range of helmet mounted ear defenders including the:








DIMENSIONS OF OUTER PACKAGING

Quantity: 20

Weight: 2.8kg (Approx.)

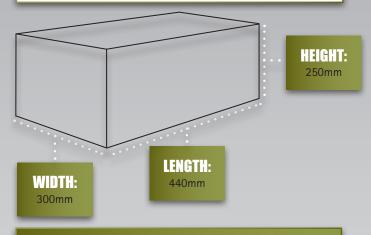

CLEANING & MAINTENANCE

The unit may be cleaned with soap and warm water and dried with a soft cloth

Do not clean with chemical or abrasive cleaners

Store out of direct sunlight away from chemicals and extremes of temperature



MATERIALS

Body: ABS (Acrylonitrile Butadiene Styrene)

Springs: Steel

Fitting Attachments: ABS (Acrylonitrile Butadiene Styrene)

DIMENSIONS OF VISOR CARRIER

Length: 260mm*

Width: 145mm*

Height: 66mm*

Weight: 147g (Approx.)*

* Dimensions and weight may differ for different models

CONFORMITY

Meets the requirements of EN166 B39

EC Type Examination Certificate Number 85724, issued by BSI Product Certification

LIMITATIONS OF USE

Protection will only be offered if the visor carrier and an adequate visor are fitted correctly to a suitable Industrial Safety Helmet with the helmet attachment kit

If the visor becomes scratched or damaged they should be replaced immediately

Do not apply paint, solvents, adhesives or self-adhesive labels, except in accordance with instructions from the manufacturer

Not suitable for use with all chemicals - if you are unsure contact your supplier or JSP for help and advice

















